

## DIGITAL CALIPER WITH INTERCHANGEABLE POINTS (NON-WATERPROOF) CODE 1124-300A

DATA  
OUTPUT



2



1124-300A

**short spherical/flat points (included)** Unit: mm





**long spherical/flat points (included)** Unit: mm



**short spherical blade points (included)** Unit: mm



**long spherical blade points (included)** Unit: mm

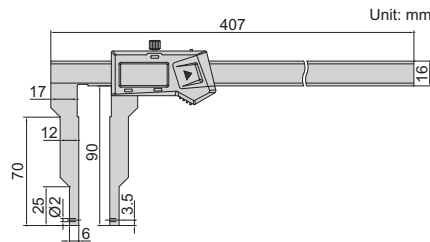


preset buttons




depth stop **6143**  
(optional)



measure internal and external grooves

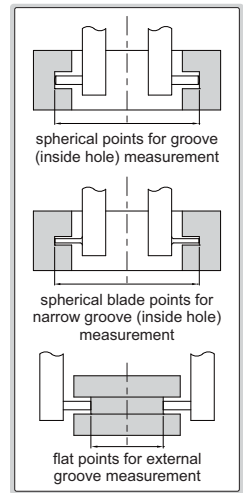

install points



zero setting block for external measurement (included)



- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code **1526-T101**, **7392**, **7391**, **7381**, **7321**), depth stop (code **6143**), data output cable (code **7315-**, **7302-**, **7305-**)

Point	Range	Accuracy	Application
short spherical/flat points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	for narrow grooves inside hole (large hole)

**Multifunctional points 7392\***  
(optional, refer to 1526-200 for more details)



**Ball points 7391\*** (optional, refer to 1526-200 for more details)



**Screw thread points 7381\*, 7321\*** (optional, refer to 1526-200 for more details)



\* It is necessary to use point sleeve (code **1526-T101**) for these points