

MEASURING ACCURACY CAN BE IMPROVED, IF THE CALIBRATION
IS MADE ON A REFERENCE SPECIMEN WITH THE ROUGHNESS
VALUE CLOSE TO THE WORKPIECE TO BE MEASURED


SURFACE ROUGHNESS REFERENCE SPECIMENS

INSIZE^{PLUS}
MADE IN UK

- To calibrate roughness testers
- Meets ISO 5436-1: 2000
- Rust proof, made of pure Nickel

Code	Roughness (Ra)
ISR-RS525X	6.25µm *
ISR-RS526X	3.15µm *
ISR-RS527X	3.0µm *
ISR-RS528X	0.5µm *
ISR-RS529X	0.1µm * (not suitable for ISR-S400)
ISR-RS530X	1.0µm *
ISR-RS531X	0.3µm * (not suitable for ISR-S400)

*The actual value may be slightly different

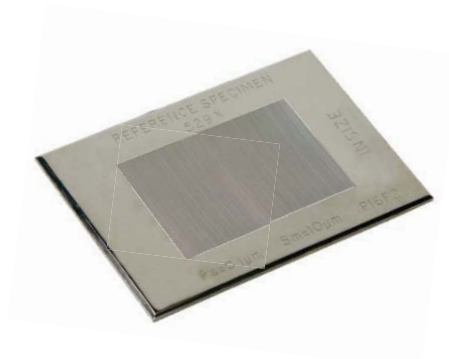

ISR-RS529X