


# COUNTING SCALES

- LCD display, with backlight
- Zero-setting, subtracting tare value, counting, accumulation, checking alarm
- Overload alarm



8101-30

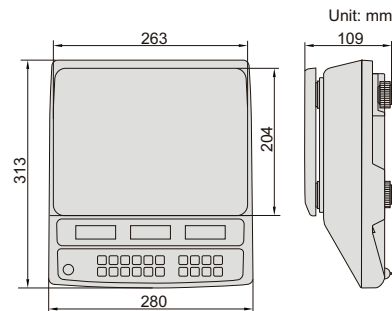

## SPECIFICATION

| Code                  | 8101-6   | 8101-15 | 8101-30 | 8101-6D | 8101-15D | 8101-30D |
|-----------------------|--|---------|---------|---------|----------|----------|
| Maximum capacity      | 6kg  | 15kg    | 30kg    | 6kg     | 15kg     | 30kg     |
| Minimum capacity      | 4g   | 10g     | 20g     | 4g      | 10g      | 20g      |
| Division              | 0.2g   | 0.5g    | 1g      | 0.2g    | 0.5g     | 1g       |
| Verification interval | 2g   | 5g      | 10g     | 2g      | 5g       | 10g      |
| Output                | no   |         |         | RS232   |          |          |
| Operating temperature | -10~40℃  |         |         |         |          |          |
| Power                 | rechargeable battery (6V/3.2Ah), power adapter (12V/500mA) |         |         |         |          |          |
| Dimensions of pan     | 263×204mm  |         |         |         |          |          |



printer (optional)

## OPTIONAL ACCESSORY (for scales with RS232)

|         |              |
|---------|--------------|
| Printer | 8001-PRINTER |
|---------|--------------|