


# DIGITAL CENTERLINE AND EDGE TO CENTER CALIPERS




1525-300


- Measure hole center distance or edge to hole center distance
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

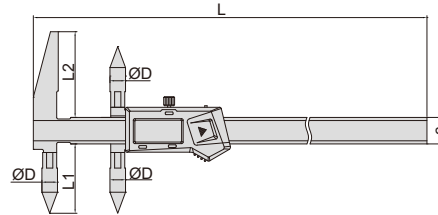

measure edge to  
hole center distance



measure hole  
center distance



## With data interface

| Code      | Range of upper jaw (edge to center) | Range of lower jaw (center to center) | Accuracy | ØD | L1   | L2 | c  | L    | Data output cable (optional) |
|-----------|-------------------------------------|---------------------------------------|----------|----|------|----|----|------|------------------------------|
| 1525-300  | 5-300mm/0.2-12"                     | 10-300mm/0.4-12"                      | ±0.08mm  | 10 | 44.5 | 55 | 17 | 410  | 7315-21, 7302-21             |
| 1525-3001 | 10-300mm/0.4-12"                    | 20-300mm/0.8-12"                      | ±0.08mm  | 20 | 48   | 60 | 17 | 410  | 7315-21, 7302-21             |
| 1525-500  | 10-500mm/0.4-20"                    | 20-500mm/0.8-20"                      | ±0.09mm  | 20 | 50   | 60 | 24 | 690  | 7315-22, 7302-22             |
| 1525-1000 | 15-1000mm/0.6-40"                   | 30-1000mm/1.2-40"                     | ±0.12mm  | 30 | 70   | 81 | 31 | 1255 | 7315-22, 7302-22             |
| 1525-1500 | 15-1500mm/0.6-60"                   | 30-1500mm/1.2-60"                     | ±0.15mm  | 30 | 70   | 81 | 31 | 1760 | 7315-22, 7302-22             |

## Built-in wireless (receiver code 7315-2/3/6/7/8 is required)

| Code        | Range of upper jaw (edge to center) | Range of lower jaw (center to center) | Accuracy | ØD | L1   | L2 | c  | L   |
|-------------|-------------------------------------|---------------------------------------|----------|----|------|----|----|-----|
| 1525-300WL  | 5-300mm/0.2-12"                     | 10-300mm/0.4-12"                      | ±0.08mm  | 10 | 44.5 | 55 | 17 | 410 |
| 1525-3001WL | 10-300mm/0.4-12"                    | 20-300mm/0.8-12"                      | ±0.08mm  | 20 | 48   | 60 | 17 | 410 |
| 1525-500WL  | 10-500mm/0.4-20"                    | 20-500mm/0.8-20"                      | ±0.09mm  | 20 | 50   | 60 | 24 | 690 |